

Digital Indicating Controller
UTAdvanced



UTAdvanced[®]

Digital Indicating Controller

UT75A / UT55A / UT52A / UT35A / UT32A

Program Controller

UP55A / UP35A / UP32A

Digital Indicator with Alarms

UM33A

3-Year Warranty

Bulletin 05P01A02-01EN

www.utadvanced.com

vigilantplant[®]
The clear path to operational excellence

YOKOGAWA ◆

Reliable and secure

Welcome the new members:

The UP32A, the UT32A dual loop and the DIN rail models.

Program Controller

UP55A



UP35A



UP32A



NEW

UT75A



UT55A



UT52A



UT35A



UT32A



Digital Controller

NEW



UT52A/MDL
UT55A/MDL
DIN Rail Mounted Controller

NEW

NEW



UT32A/MDL
UT35A/MDL
DIN Rail Mounted Controller

UT32A-D
(Dual-loop type)

Configuration and Programming Software

UM33A

Digital Indicator with Alarms



LL50A



UTA Advanced®

**Make your
equipment easy
to use**

**Clearly see
what your process
is doing**

**A variety
of functions,
for easy
connectivity**

**Useful
ladder sequence
control**

Reliability

- RoHS/WEEE
- NEMA4*/IP66 Front Panel

* Hose down test only.



CSA C22.2 61010-1



UL61010-1



CE marking conformance available soon with the /MDL option.

NEW

Space saving options

- 1/8th DIN 2-loop controller (UT32A-D)
- CC-Link communication available in a 48 x 96 mm (1/8 DIN) size
- 1/8th DIN Program controller (UP32A)
- DIN rail Mounted controller (/MDL option)

More UP55A program patterns


- 99 program patterns (/AP option)

Make your equipment easy to use

Setting and managing parameters


Easily edit settings from a PC while the unit is mounted in the control panel.

Settings are accessed through a dedicated adapter on the front panel. Ethernet-equipped controllers can be programmed remotely.

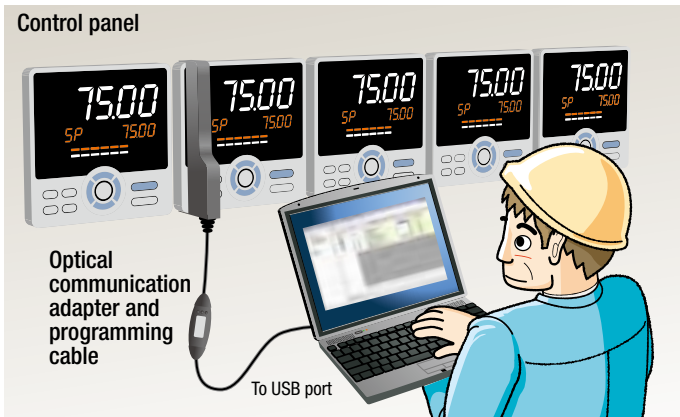

- Set up parameters
- Controller data read/write/compare
- Data management
- Print parameters and data; create reports
- Configure user defaults

Set up right out of the box

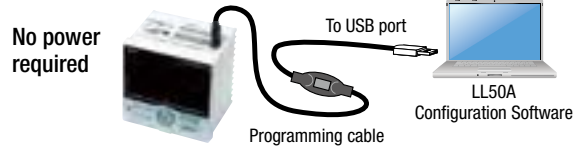


* With DIN rail mounted controllers, power is required. Free software is available on the web for converting GREEN series parameters to UTAdvanced.

A single unit supports multiple applications

Universal Input and Output

Supports different sensors, heaters, and actuators

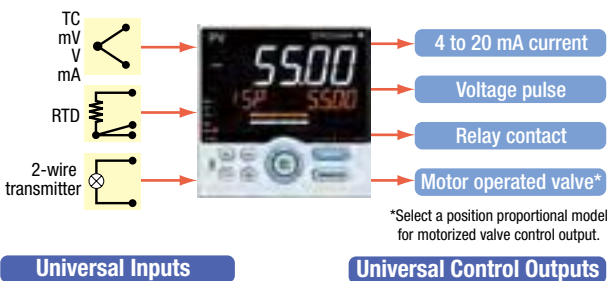


Easily reset to your original settings

The user default function allow you to recover from operator mistakes.


Set your user default values with the LL50A configuration tool.

If critical parameter values are accidentally changed and can not be easily identified, the user default can restore them to the original values with a few button strokes.

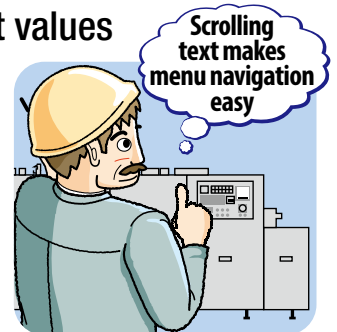

Save space in the control panel

Side-by-side close mounting on DIN rails in the panel

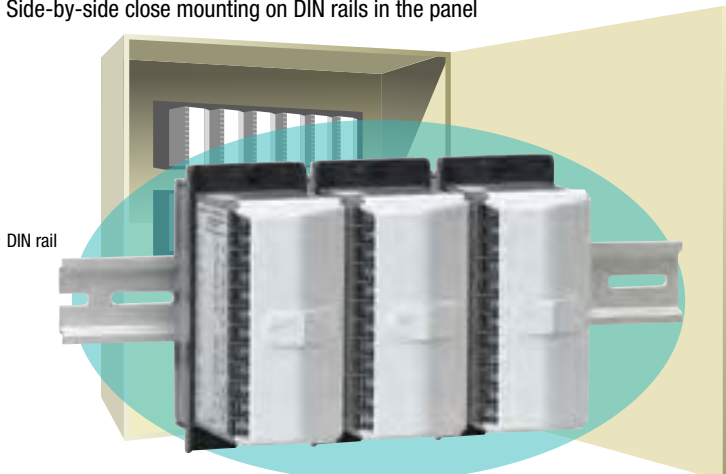

Status indicator (LED)

Green: Normal
Red: Abnormal

- **Ambient temperature:** -10 to 50 °C (0 to 50 °C with CC-Link installed)
- **2-loop control in a single unit** (UT32A-D/MDL)



UT32A/MDL
UT52A/MDL
UT32A-D/MDL

Clearly see what your process is doing

Bright & Easy to Read Active Color LCD Display



UT55A 1/4 DIN (96x96mm) size

Full size
PV display
(text height: 21.55 mm)

5 digit display


14 segment display



UT52A 1/8 DIN (48x96mm) size

Active Color PV Display


See the status of your process conditions **INSTANTLY!**

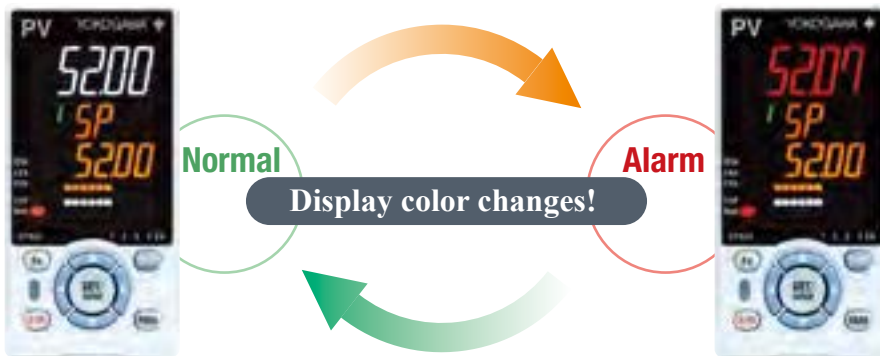

- Alarms
- Deviation values
- Measured values
- Contact input
- Choice of fixed white or red

Navigation guides and keys make it easy to operate


Navigation guide will tell you what key can be pressed next

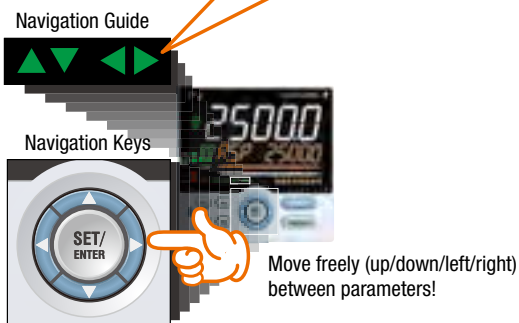

One-touch operation

Programmable Function Keys

You can assign frequently used operations (start/stop, remote/local, etc.) and parameter entries (PID value, etc.) to function keys for one-touch operation.

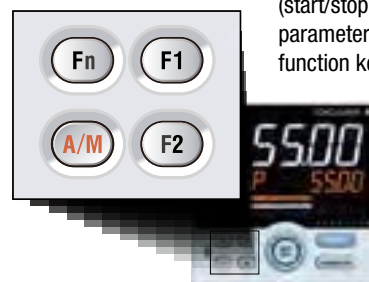

UT series

A variety of functions, for easy connectivity

Communication protocol

Connect to PLCs without programming!



Modbus/TCP
Modbus RTU/ASCII

Ladder communication
PC-Link

CC-Link

DeviceNet

PROFIBUS




Open Network



- Recipe management
- Remote monitoring

You can easily set setpoints (SP), PID, and alarms from a PLC.

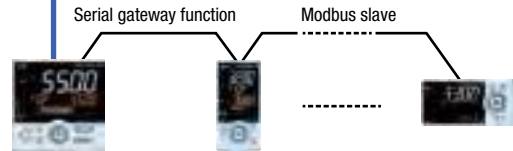


UTAdvanced with RS-485 communication

Space-saving built-in CC-Link models

- UT52A, UT32A, UM33A, UT52A/MDL, UT32A/MDL

Modbus/TCP

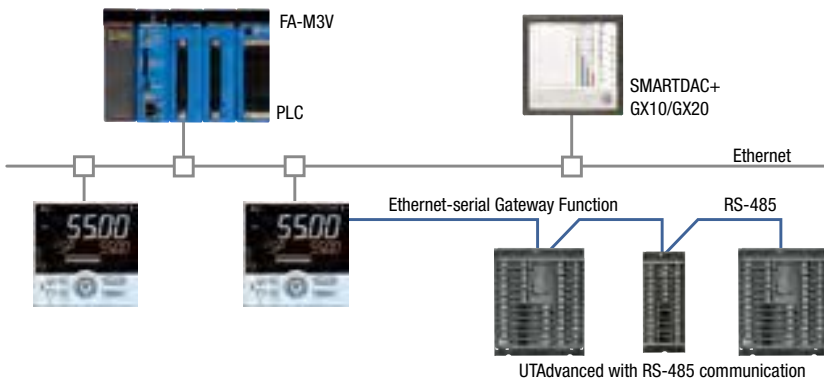

Modbus TCP, a protocol that allows the controller to connect to Ethernet network and have the ability to exchange data with the computers or devices on that network.

- Gateway function allows RS-485 Modbus devices to communicate via Ethernet.
- Physical layer: 10 BASE-T/100 BASE-TX
- Max. number of connection : 2

Peer to Peer

The use of the ladder sequence program makes it possible to exchange analog data and status data between communication-capable UTs.

Example: A UT in which an input error occurs sends a signal to another UT to enable that UT switch to MAN operation, thus shifting the whole system into a safe mode. In such a case, the safety mechanism can be built into the UTAdvanced and is not required in the host system.


* Create ladder sequence programs by the LL50A Parameter Setting software (sold separately).



Coordinated operation

Coordinated operation: This function syncs operation of the slave with that of the master through Yokogawa's proprietary communication protocol.

- Finely adjust the temperature setting of the slave with the bias and ratio
- PLC or other device not needed for tuning
- No programming means fewer engineering manhours

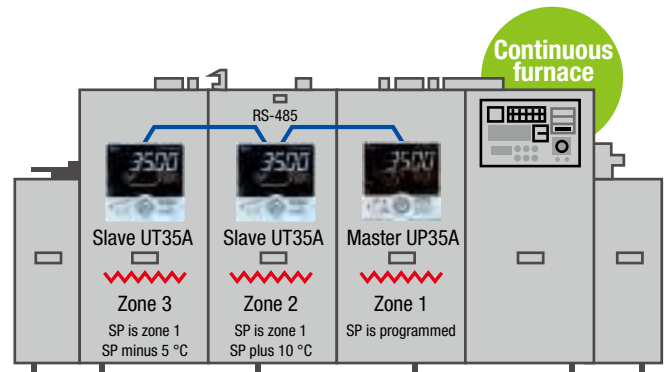

Useful ladder sequence control


Easily adapts to the customer's requirements

Using the UTAdvanced's ladder sequence control offers a low-cost alternative for applications typically dependent on PLCs, timers, and relays. It saves wiring time and space. The ladder sequence control allows us to meet the ever changing needs of our customers.


* Requires parameter setting software (sold separately).



Less wiring

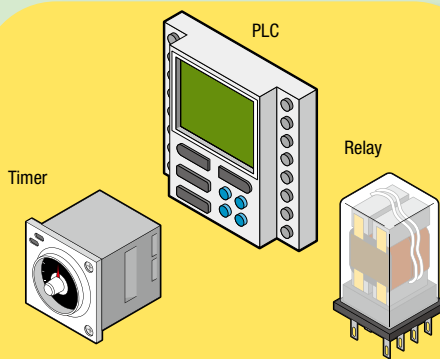

You can recreate the operation of timers and relays in the controller's ladder programs.

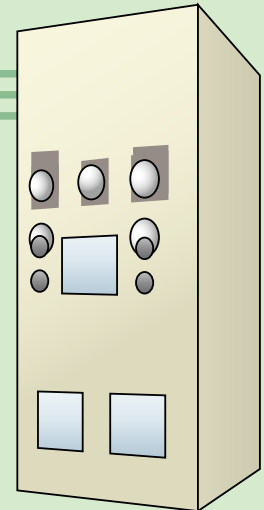

Sudden specification changes?

Benefits

Fewer instruments

Lower cost

Less wiring

Saves space

Highly flexible

Example:

Alarm annunciator lamp routine


Desired operation

- Lamp blinks on a new alarm
- Lamp is on solid when the active alarm is acknowledged
- Lamp goes out when alarm clears




Acknowledge alarms with function keys

Time Chart



Alarm Ladder Sequence Program




Example: On delay timer


Desired operation

- Hold down the F1 key for 5 sec. or longer to turn relay ON
- Release F1 key to turn relay OFF

Time Chart








Program








Product Line-up



| Model | | UT75A | UT55A | UT52A | UT35A |
|---|-----------------------|--|--|------------------|--|
| Size (W x H x D) | | 96×96×65mm | | 48×96×65mm | 96×96×65mm |
| Weight | | 500 g or less | | | |
| DIN rail mountable (no display/keys) | | No | Yes (option) | | |
| Input sampling period (control scan period) | | 50, 100, 200ms | | | 200ms |
| Number of analog inputs | PV input | 1: Standard type 2: Dual-loop type | 1 | | |
| | Aux. analog input | 2 (max.) | 3 (max.) | 1 (max.) | 1 (non-isolated) |
| PV input indication accuracy | | ±0.1 % of F.S. | | | |
| PV input type | | TC : K, J, T, B, S, R, N, E, L, U, W, PL-2, PR20-40, W97Re3-W75Re25 RTD : JPt100, Pt100 mA : 4 to 20mA, 0 to 20mA mV, V : 1 to 5V, 0 to 10V, 0 to 2V, 0.4 to 2V, -10 to 20mV, 0 to 100mV | | | |
| Number of analog outputs | Control output | 1 (max. 2) | | | 1 (only with 1 control output) |
| | Retransmission output | 1 | | | |
| Control output type | | Relay output : Contact rating (250VAC, 3A or 30 VDC, 3A)Normally open, 2 point (Heating/cooling output in UT52A/UT32A) Current output : 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA Voltage pulse output | | | |
| Retransmission output (aux. output) | | 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA | | | |
| Number of digital inputs | Standard | 3 | 3 | 3 | 2 |
| | Maximum | 9 | 9 | 5 | 7 |
| Number of digital outputs | Standard | 3 | 3 | 3 | 3 |
| | Maximum | 8 | 18 | 5 | 8 |
| Communication | | RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet | | RS485 CC-Link | RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet |
| Number of SP groups | | 20 | 8 | | 4 |
| Number of PID groups | | 16 | | | |
| Number of alarm groups | | 8 | | | |
| Number of ladder steps | | 1000 | 500 | | 300 |
| Number of ladder instructions | | Basic instruction : 15 Application instruction : 111 | Basic instruction : 13 Application instruction : 73 | | |
| Number of program patterns | Standard | 1 | None | | |
| | Max. (option) | | | | |
| Total number of segments | Standard | 20 | | | |
| | Max. (option) | | | | |
| Power supply | | 100-240VAC or 24VAC/DC | | | |
| Power consumption (at 100 V AC) | | 18VA | 15VA | | 18VA |
| Screw terminal size | | M3.0 | | | |
| 24 V DC loop power supply | | Yes (option) | | | |
| Heater burnout alarm | | No | Yes (option) Excludes DIN rail mounting types | | |
| Dust and waterproof level of front panel | | NEMA4*/IP66 Front Panel Excludes DIN rail mounting types | | | |
| RoHS/WEEE | | Compliant | | | |
| Safety and EMC standards | |      <small>* CE marking certification available soon with the /MDL option.</small> | | | |
| GS (General Specifications) | | GS 05P01B41-01EN | GS 05P01C31-01EN GS 05P01C81-01EN | | GS 05P01D31-01EN GS 05P01D81-01EN |



| UT32A | | UT32A-D | | UP55A | | UP35A | | UP32A | | UM33A | |
|---|--|--|--|--|--|--------------------------------|--|------------------|--|----------------------------------|--|
| 48×96×65mm | | | | 96×96×65mm | | | | 48×96×65mm | | 96×48×65mm | |
| 500 g or less | | | | | | | | | | | |
| Yes (option) | | | | No | | | | | | | |
| 200ms | | | | 100, 200ms | | 200ms | | 50, 100, 200ms | | | |
| 1 | | 2 | | 1 | | | | | | | |
| 1 (non-isolated) | | None | | 3 (max.) | | None | | | | | |
| ±0.1 % of F.S. | | | | | | | | | | | |
| TC : K, J, T, B, S, R, N, E, L, U, W, PL-2, PR20-40, W97Re3-W75Re25 | | | | | | | | | | | |
| RTD : JPt100, Pt100 | | | | | | | | | | | |
| mA : 4 to 20mA, 0 to 20mA | | | | | | | | | | | |
| mV, V : 1 to 5V, 0 to 10V, 0 to 2V, 0.4 to 2V, -10 to 20mV, 0 to 100mV | | | | | | | | | | | |
| 1 (max. 2) | | 2 | | 1 (max. 2) | | | | | | None | |
| 1 (only with 1 control output) | | None | | 1 | | 1 (only with 1 control output) | | | | 1 | |
| Relay output : Contact rating (250VAC, 3A or 30 VDC, 3A) Normally open (UT32A-D) Normally open, 2 point (Heating/cooling output in UP32A) | | | | | | | | | | None | |
| Current output : 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA | | | | | | | | | | None | |
| Voltage pulse output | | | | | | | | | | | |
| 4 to 20mA, 0 to 20mA, 20 to 4mA, 20 to 0mA | | None | | 4 to 20mA, 0 to 20 mA, 20 to 4 mA, 20 to 0 mA | | | | | | | |
| 2 | | 3 | | 8 | | 3 | | 3 | | 2 | |
| 4 | | 3 | | 9 | | 8 | | 5 | | 3 | |
| 3 | | 3 | | 8 | | 3 | | 3 | | 9 | |
| 5 | | 3 | | 18 | | 8 | | 5 | | 9 | |
| RS485 CC-Link | | RS485 | | RS485 Ethernet CC-Link PROFIBUS-DP DeviceNet | | | | RS485 CC-Link | | RS485 CC-Link | |
| 4 | | | | 1 | | | | | | | |
| 300 | | | | 8 | | 4 | | None | | | |
| 300 | | | | 500 | | 2 | | 8 | | | |
| 300 | | | | 500 | | 300 | | None | | | |
| Basic instruction : 13 | | | | | | | | | | None | |
| Application instruction : 67 | | | | | | | | | | None | |
| None | | | | 30 | | 2 | | None | | | |
| None | | | | 99 | | 4 | | None | | | |
| None | | | | 300 | | 20 | | None | | | |
| None | | | | 600 | | 40 | | None | | | |
| 100-240VAC or 24VAC/DC | | | | | | | | | | | |
| 15VA | | | | 18VA | | | | 15VA | | | |
| M3.0 | | | | | | | | | | | |
| Yes (option) | | | | No | | | | | | | |
| Yes (option) | | Yes (option) Excludes DIN rail mounting types | | Yes (option) | | | | | | Yes (option) | |
| NEMA4*/IP66 Front Panel | | | | | | | | | | Excludes DIN rail mounting types | |
| Compliant | | | | | | | | | | | |
|      | | | | | | | | | | | |
| GS 05P01D31-01EN GS 05P01D81-01EN | | | | GS 05P08D31-01EN GS 05P08D81-01EN | | GS 05P02C41-01EN | | GS 05P02D41-01EN | | GS 05P03D21-01EN | |
| * CE marking certification available soon with the /MDL option. | | | | | | | | | | | |

Product Line-up


Digital Indicating Controller UT55A/UT52A (Standard model)



Main Features

- Up to 4 analog inputs available
- 3 alarm relays with independent common terminals
- 500 steps of ladder logic control
- Simple operation
- Up to 18 DOs (various combinations available)

External Dimensions

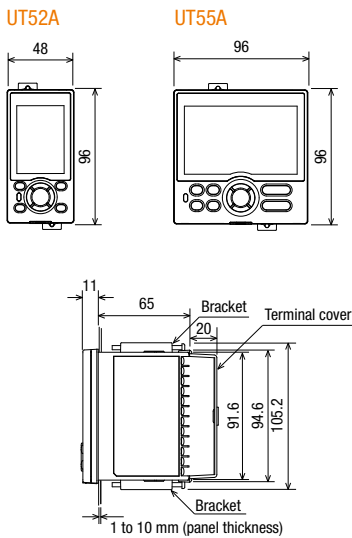

Unit: mm

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|---|
| UT55A | | | Digital Indicating Controller (Power supply 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply , 3 Dis, and 3 DOs) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2:Functions | 0 | | None |
| | 1 | | Remote (1 additional aux. analog) input, 6 additional Dis, 5 additional DOs, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) ⁽¹⁾⁽²⁾ |
| | 2 | | Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 19.2 kbps, 2-wire/4-wire) ⁽²⁾ |
| | 3 | | 5 additional Dis and 5 additional DOs |
| | 4 | | Remote (1 additional aux. analog) input and 1 additional DI |
| | 5 | | Remote (1 additional aux. analog) input, 6 additional Dis, and 5 additional DOs |
| | 6 | | 5 additional Dis, and 15 additional DOs ⁽¹⁾ |
| | 7 | | 3 additional aux. analog inputs and 3 additional Dis |
| Type 3: Open networks | 0 | | None |
| | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| Display language ⁽³⁾ | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /DR | Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted ⁽⁴⁾ |
| | | /LP | 24 V DC loop power supply ⁽⁵⁾ |
| | | /HA | Heater break alarm ⁽⁵⁾ |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ⁽⁶⁾ |


- ¹: When the Type 2 code is "1" or "6", only "0" can be specified for the Type 3 code.
²: When the /LP option is specified, the RS-485 communication of the Type 2 code "1" or "2" is 2-wire system.
³: English, German, French, and Spanish are available for the guide display.
⁴: The /DR option can be specified when the Type 2 code is any of "1", "2", "4", "5", or "7".
⁵: The /LP option can be specified in the combination of Type 2 code (any of "0", "2", "3", or "4") and Type 3 code (any of "0" or "1"). Additionally the /LP option can be specified in the combination of Type 2 code "1" and Type 3 code "0".
⁶: The /HA option can be specified only when the Type 1 code is "-0".
⁷: When the /CT option is specified, the UT55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|--|
| UT52A | | | Digital Indicating Controller (Power supply 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply , 3 Dis, and 3 DOs) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2: Functions | 0 | | None |
| | 1 | | Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire) |
| | 2 | | Remote (1 additional aux. analog) input and 1 additional DI |
| | 3 | | 2 additional Dis, and 2 additional DOs |
| Type 3: Open networks | 0 | | None |
| | 3 | | CC-Link communication (with Modbus master function) ⁽¹⁾ |
| Display language ⁽³⁾ | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /DR | Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted ⁽³⁾ |
| | | /LP | 24 V DC loop power supply ⁽⁴⁾ |
| | | /HA | Heater break alarm ⁽⁵⁾ |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ⁽⁶⁾ |

- ¹: The Type 3 code "3" can be specified only when the Type 1 code is "-0" and the Type 2 code is "0".
²: English, German, French, and Spanish are available for the guide display.
³: The /DR option can be specified only when the Type 2 code is "2" and the Type 3 code is "0".
⁴: The /LP option can be specified only when the Type 1 code is "-0" or "-1". Furthermore both Type 2 and Type 3 codes should be "0".
⁵: The /HA option can be specified only when the Type 1 code is "-0" and the Type 3 code is "0".
⁶: When the /CT option is specified, the UT52A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


Application examples

• Cascade control

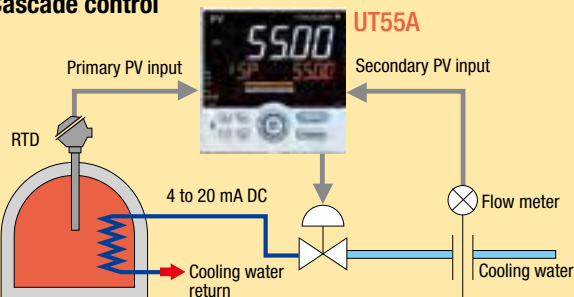

• Industrial furnace temperature control

Position proportional control for actuator motor

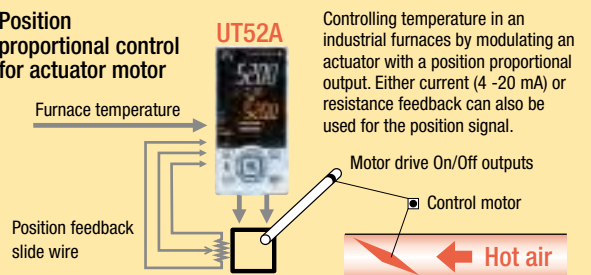


Digital Indicating Controller UT35A/UT32A (Standard model)



Main Features

- 4 target setpoints and PID sets available
- 3 alarm relays with independent common terminals
- 300 steps of ladder logic control
- Simple operation
- Up to 8 DOs (various combinations available)

External Dimensions

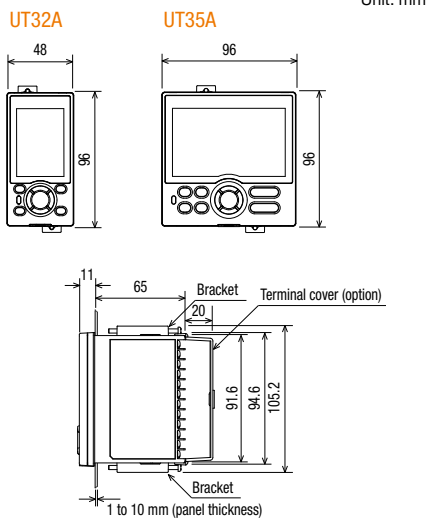

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|--|
| UT35A | | | Digital Indicating Controller (Power supply: 100-240 V AC)(provided with retransmission output or 15 V DC loop power supply, 2 DIs, and 3 DOs) |
| Type 1: Basic control | -0 | | Standard type |
| | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2:Functions | 0 | | None |
| | 1 | | 2 additional DIs, 2 additional DOs |
| | 2 | | 5 additional DIs, 5 additional DOs |
| Type 3: Open networks | 0 | | None |
| | 1 | | RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| Display language ⁽²⁾ | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /LP | 24 V DC loop power supply ⁽²⁾ |
| | | /HA | Heater break alarm ⁽³⁾ |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ⁽⁴⁾ |
| | | /CV | Terminal cover |
| | | /RSP | Non-isolated remote input (please see the General Specifications GS 05P01D31-81EN.) |


¹: English, German, French, and Spanish are available for the guide display.
²: The /LP option can be specified in the combination of Type 2 code (any of "0" or "1") and Type 3 code (any of "0" or "1").
³: The /HA option can be specified only when the Type 1 code is "-0" or "-2."
⁴: When the /CT option is specified, the UT35A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|---|
| UT32A | | | Digital Indicating Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 DIs, and 3 DOs) |
| Type 1: Basic control | -0 | | Standard type |
| | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2:Functions | 0 | | None |
| | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) ⁽¹⁾ |
| | 2 | | 2 additional DIs and 2 additional DOs |
| Type 3: Open networks | 0 | | None |
| | 3 | | CC-Link communication (with Modbus master function) ⁽²⁾ |
| Display language ⁽³⁾ | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /LP | 24 V DC loop power supply ⁽⁴⁾ |
| | | /HA | Heater break alarm ⁽⁵⁾ |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ⁽⁶⁾ |
| | | /CV | Terminal cover |
| | | /RSP | Non-isolated remote input (please see the General Specifications GS 05P01D31-81EN.) |


¹: When the /LP option is specified, the RS-485 communication of the Type 2 code "1" is 2-wire system.
²: The type 3 code "3" can be specified only when the Type 1 code is "-0" and the Type 2 code is "0."
³: English, German, French, and Spanish are available for the guide display.
⁴: The /LP option can be specified in the combination of Type 1 code (any of "-0" or "-1"), Type 2 code (any of "0" or "1") and Type 3 code "0."
⁵: The /HA option can be specified in the combination of Type 1 code "-0" or "-2," and Type 3 code "0."
⁶: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

Application examples

• Electric furnace

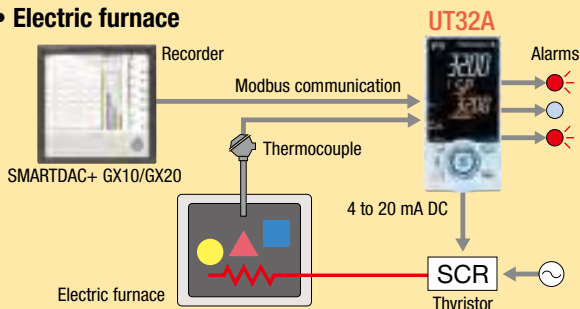

• Heating/cooling control

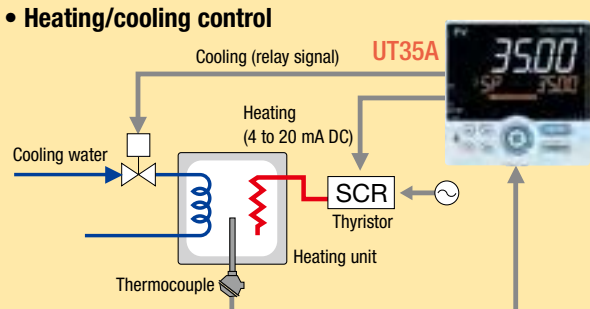

Product Line-up

DIN Rail Mounted Controller




Main Features

- DIN rail mounting
- Tidy appearance
- Up to 4 analog inputs available
- 3 alarm relays with independent common terminals
- 500 steps of ladder logic control
- Comes with a wealth of functions


External Dimensions

UT55A/UT35A (with option /MDL)

Unit: mm

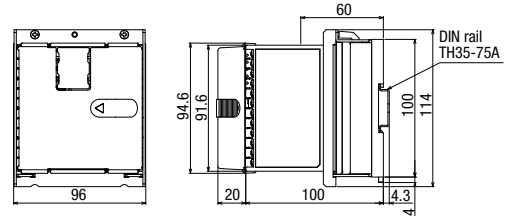

UT52A/UT32A (with option /MDL)

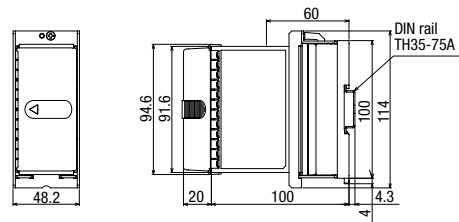

UT55A/UT52A: terminal cover comes standard
UT35A/UT32A: terminal cover sold separately

| Model | Suffix code | Optional suffix code | Description |
|--------------------------|-------------|---------------------------|---|
| UT55A | | /MDL (Required) | DIN Rail Mounted Controller (Power supply 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs) (without the display parts and keys) |
| Type 1: | -0 | | Standard type |
| Basic control | -2 | | Heating/cooling type |
| Type 2: Functions | 0 | | None |
| | 2 | | Remote (1 additional aux. analog input, 1 additional DI, and RS-485 communication (Max. 19.2 kbps, 2-wire or 2-wire/4-wire) ^{(*)1}) |
| | 3 | | 5 additional DIs and 5 additional DOs |
| | 4 | | Remote (1 additional aux. analog input and 1 additional DI) |
| | 5 | | Remote (1 additional aux. analog input, 6 additional DIs, and 5 additional DOs) |
| Type 3: Open networks | 7 | | 3 additional aux. analog inputs and 3 additional DIs |
| | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| Fixed code | -1 | | Temperature unit: deg C & deg F |
| | 1 | | Black (Light charcoal gray) |
| | -00 | | Always "-00" |
| Optional suffix codes | | /MDL (Required) | Mount on DIN rail (without the display parts and keys) ^(**) |
| | | /DC | 24 V DC loop power supply ^(**) |
| | | /LP | Power supply 24 V AC/DC |
| | | /CT | Coating ^(**) |

*1: When the /LP option is specified, the RS-485 communication of the Type 2 code "2" is 2-wire system.
*2: The /MDL option and /LP option can be specified in the combination of type 2 code (any of "0", "2", "3", or "4") and Type 3 code "1".
*3: When the /CT option is specified, the UT55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

| Model | Suffix code | Optional suffix code | Description |
|-----------------------|-------------|---------------------------|---|
| UT52A | | /MDL (Required) | DIN Rail Mounted Controller (Power supply 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs) (without the display parts and keys) |
| Type 1: | -0 | | Standard type |
| Basic control | -2 | | Heating/cooling type |
| Type 2: Functions | 0 | | None |
| | 1 | | Remote (1 additional aux. analog input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire)) |
| | 0 | | None |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 0 | | None |
| Fixed code | -1 | | Temperature unit: deg C & deg F |
| | 1 | | Black (Light charcoal gray) |
| | -00 | | Always "-00" |
| Optional suffix codes | | /MDL (Required) | Mount on DIN rail (without the display parts and keys) ^(**) |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^(**) |

*1: When the /MDL option is specified, the model and the suffix codes are as follows:
UT52A-010-11-00/x/MDL
UT52A-003-11-00/x/MDL
*2: When the /CT option is specified, the UT52A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


| Model | Suffix code | Optional suffix code | Description |
|--------------------------|-------------|---------------------------|--|
| UT35A | | /MDL (Required) | DIN Rail Mounted Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 DIs, and 3 DOs) (without the display parts and keys) |
| Type 1: | -0 | | Standard type |
| Basic control | -2 | | Heating/cooling type |
| Type 2: Functions | 0 | | None |
| | 2 | | 5 additional DIs, 5 additional DOs |
| | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) |
| Type 3: Open networks | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| | 1 | | Temperature unit: deg C & deg F |
| Fixed code | -1 | | Black (Light charcoal gray) |
| | 1 | | Always "-00" |
| | -00 | | Always "-00" |
| Optional suffix codes | | /MDL (Required) | Mount on DIN rail (without the display parts and keys) ^(**) |
| | | /LP | 24 V DC loop power supply ^(**) |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^(**) |
| | | /CV | Terminal cover |

*1: The /MDL option and /LP option can be specified in the combination of Type 2 code "0" and Type 3 code "1".
*2: When the /CT option is specified, the UT35A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

| Model | Suffix code | Optional suffix code | Description |
|--------------------------|-------------|---------------------------|--|
| UT32A | | /MDL (Required) | DIN Rail Mounted Controller (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 DIs, and 3 DOs) (without the display parts and keys) |
| Type 1: | -0 | | Standard type |
| Basic control | -2 | | Heating/cooling type |
| Type 2: Functions | 0 | | None |
| | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) ^(**) |
| | 0 | | None |
| Type 3: Open networks | 3 | | CC-Link communication (with Modbus master function) |
| | -1 | | Temperature unit: deg C & deg F |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | -1 | | Temperature unit: deg C & deg F |
| | 1 | | Black (Light charcoal gray) |
| | -00 | | Always "-00" |
| Optional suffix codes | | /MDL (Required) | Mount on DIN rail (without the display parts and keys) ^(**) ^(**) |
| | | /LP | 24 V DC loop power supply ^(**) |
| | | /HA | Heater break alarm ^(**) |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^(**) |
| | | /CV | Terminal cover |

*1: When /LP option is specified, the RS-485 communication of the type 2 code "1" is 2-wire system.
*2: The /MDL option is specified, the model and suffix codes are as follows:
UT32A-010-11-00/x/MDL
UT32A-003-11-00/x/MDL
UT32A-210-11-00/x/MDL
*3: When /MDL option and /LP option is combined, "3" can not be specified for Type 3 code.
*4: The /HA option can be specified only in the combination of type 2 code "1" and Type 3 code "0".
*5: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


Dual-loop Controller UT32A-D

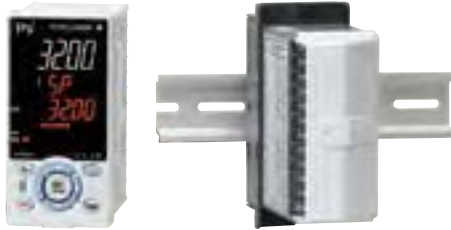


External Dimensions

Unit: mm

UT32A-D

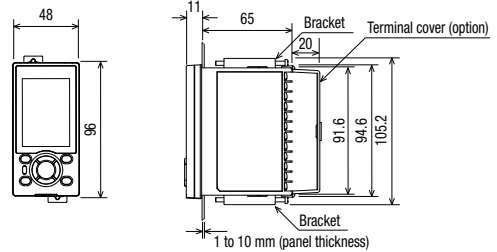

UT32A-D (with option /MDL)

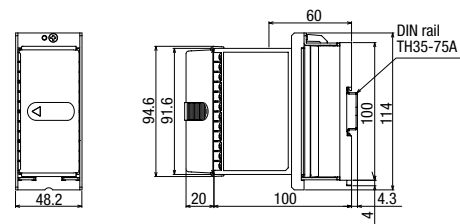

Main Features

- Dual-loop control
- Space-saving
- Simple operation
- Ladder sequence programs can be built
- 3 alarms available as standard

Panel mounting

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|--|
| UT32A | | | Digital Indicating Controller (Power supply: 100-240 V AC) (provided with 3 DIs and 3 DOs) |
| Type 1: Basic control | -D | | Dual-loop type |
| Type 2: Functions | 0 | | None |
| Type 3: Fixed code | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) |
| Display language ^(*) | 0 | | None |
| | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | -00 | | Always "-00" |
| Optional suffix codes | /HA | | Heater break alarm ^(**) |
| | /DC | | Power supply 24 V AC/DC |
| | /CT | | Coating ^(***) |
| | /CV | | Terminal cover |

*1: English, German, French, and Spanish are available for the guide display.

*2: The /HA option can be specified when the Type 2 code is "0."

*3: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


DIN rail mounting

| Model | Suffix code | Optional suffix code | Description |
|-----------------------|---------------------------|---------------------------|--|
| UT32A | | /MDL (Required) | DIN Rail Mounted Controller (Power supply: 100-240 V AC) (provided with 3 DIs, and 3 DOs) (without the display parts and keys) |
| Type 1: Basic control | -D | | Dual-loop type |
| Type 2: Functions | 1 | | RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) |
| Type 3: Fixed code | 0 | | None |
| Fixed code | -1 | | Temperature unit: deg C & deg F |
| Case color | 1 | | Black (Light charcoal gray) |
| Fixed code | -00 | | Always "-00" |
| Optional suffix codes | /MDL (Required) | | Mount on DIN rail (without the display parts and keys) |
| | /DC | | Power supply 24 V AC/DC |
| | /CT | | Coating ^(**) |
| | /CV | | Terminal cover |


*1: When the /CT option is specified, the UT32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

Application examples

• Incubator control

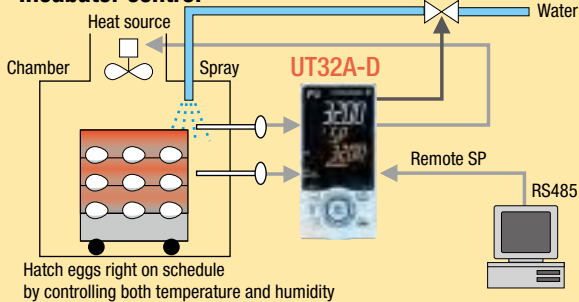

• Control of reflow furnaces

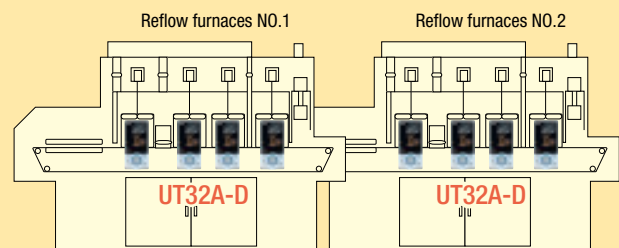


Product Line-up

Digital Indicating Controller UT75A



External Dimensions

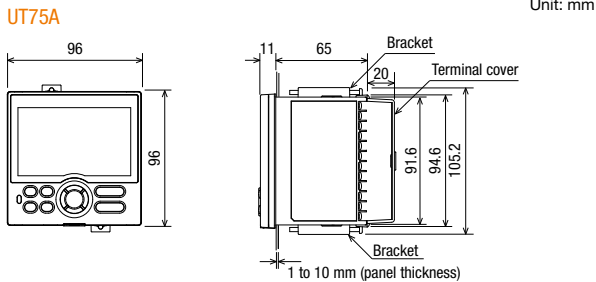


| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|--|
| UT75A | | | Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply, 3 Dis, and 3 DOs) (Power supply 100-240 V AC) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -5 | | Dual-loop type 5 additional Dis and 5 additional DOs |
| Type 2: Functions | 0 | | None |
| | 1 | | Remote (1 additional aux. analog) input, RS485 communication (Max.19.2 kbps, 2-wire), 1 additional DI, and 5 additional DOs |
| | 2 | | Remote (2 additional aux. analog) inputs, RS485 communication (Max.19.2 kbps, 2-wire), 2 additional Dis |
| | 3 | | Remote (1 additional aux. analog) input, 6 additional Dis, 5 additional DOs ⁽¹⁾ |
| Type 3: Open networks | 0 | | None |
| | 1 | | RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) and 5 additional Dis |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| Display language ⁽²⁾ | -1 | | English (Default. Can be switched to Spanish by the setting.) |
| | -2 | | German (Customized order) |
| | -3 | | French (Customized order) |
| | -4 | | Spanish (Default. Can be switched to English by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | -00 | | Always "-00" |
| Optional suffix codes | /DC | | Power supply 24 V AC/DC |
| | /CP | | Carbon potential calculation function ⁽³⁾ |
| | /CT | | Coating ⁽⁴⁾ |

¹: When Type 1 code is "-5", "3" cannot be specified for Type 2 code.
²: English and Spanish are available for the guide display.
 (German and French guide displays are customized. Contact our representatives for inquiries.)
³: Only when Type 2 code is "1", "2" or "3", the /CP option can be specified.
⁴: When the /CT option is specified, the UT75A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


Enhancing Productivity by Managing a Variety of Recipes

Switch between 20 setpoint conditions

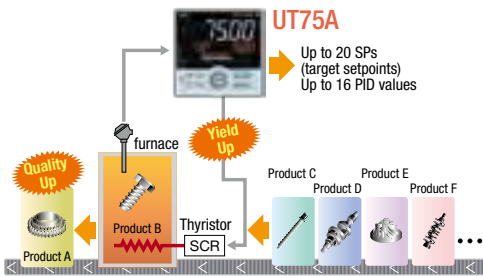


Program pattern operation

- Program pattern consists of up to 20 segments
- 2-loop program pattern can be operated

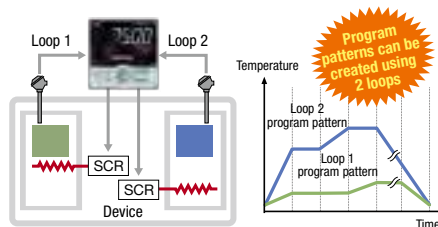

Easy to switch between recipes with a PLC

- Since CC-Link, Profibus, and DeviceNet are supported, it is easy to link to a PLC that manages recipes

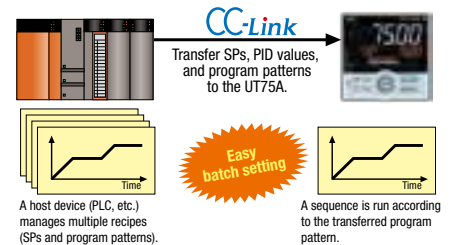


Application examples

2-loops of control with a single controller

- 2-loop synchronous and independent operation
 - The start and stop instructions can be run synchronously or independently.
- Program pattern operation and single setpoint operation are available for 2-loop control
 - A sequence can be run by combining the program pattern on one loop and a fixed setpoint on the other.


Temperature/humidity control

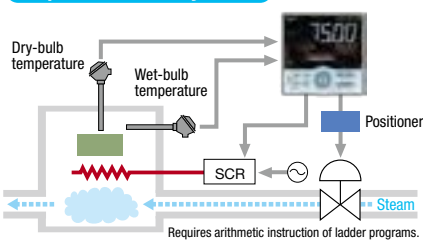


A variety of arithmetic instructions and large capacity ladder programs

- 15 basic instructions and 111 application instructions
- Ladder program capacity up to 1,000 steps

CP control

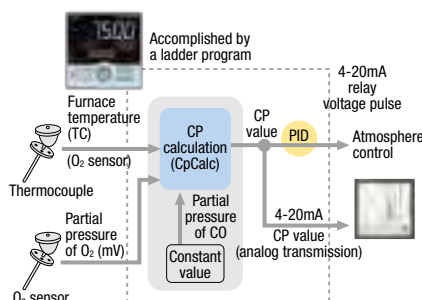

CP control

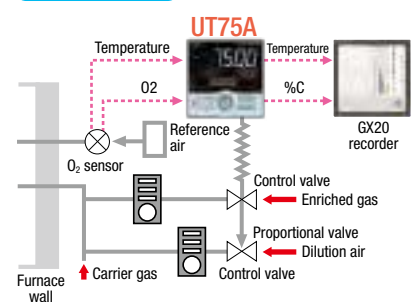


Program Controller UP55A (Standard model)



Main Features

- Up to 99 program patterns
- 8 PV events, 16 time events, and 8 alarms can be monitored simultaneously
- Ladder sequence programs can be built
- Simple operation
- Up to 9 DIs and 18 DOs (combinations available)

External Dimensions

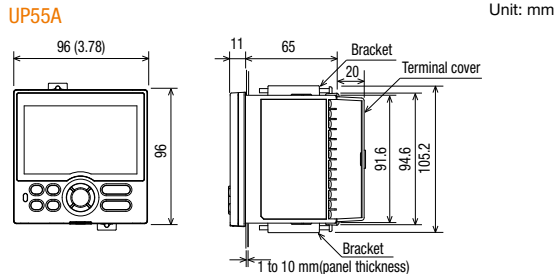

| Model | Suffix code | Optional Suffix code | Description |
|----------------------------------|-------------|----------------------|--|
| UP55A | | | Program Controller (Power supply: 100-240 V AC) 30 program patterns / 300 program segments (99 program patterns / 600 program segments when the option /AP is specified. Max. 99 segments per pattern)(provided with retransmission output or 15 V DC loop power supply, 8 DIs, and 8 DOs) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| | 0 | | None |
| Type 2:Functions | 1 | | Remote (1 additional aux. analog input, 1 additional DI) |
| | 2 | | RS-485 communication (Max.19.2 kbps, 2-wire/4-wire) |
| | 3 | | 10 additional DOs ^{(*)1} |
| | 4 | | 3 additional aux. analog inputs, 2 DIs and 5 DOs to be deleted |
| Type 3: | 0 | | None |
| Open networks | 1 | | RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| Display language ^{(*)2} | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /AP | 69 additional patterns/300 additional segments |
| | | /DR | Additional direct input (TC and 3-wire/4-wire RTD) and current input to Remote (1 additional aux. analog input, 1 DI to be deleted) ^{(*)3} |
| | | /HA | Heater break alarm ^{(*)4} |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^{(*)5} |

*1: When the Type 2 code is "3", only "0" can be specified for the Type 3 code.

*2: English, German, French, and Spanish are available for the guide display.

*3: The /DR option can be specified only when the Type 2 code is "1" or "4."

*4: The /HA option can be specified only when the Type 1 code is "0."

*5: When the /CT option is specified, the UP55A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).


Program Controller UP35A/UP32A (Standard model)



Main Features

- Up to 4 program patterns
- 2 PV events, 4 time events, and 2 alarms can be monitored simultaneously.
- Ladder sequence programs can be built
- Simple operation
- Up to 8 DIs and 8 DOs (combinations available)

External Dimensions

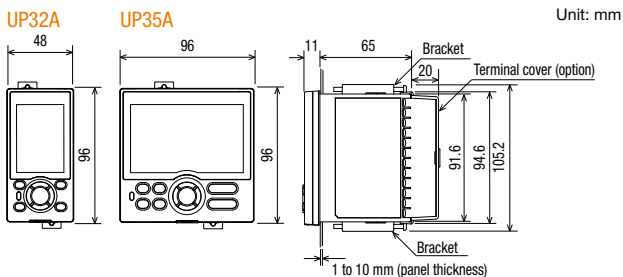

UP35A *1: English, German, French, and Spanish are available for the guide display.

*2: The /HA option can be specified only when the Type 1 code is "-0" or "-2."

*3: When the /CT option is specified, the UP35A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

UP32A *1: Type 3 code "3" can be specified only when both Type 1 and Type 2 code are "0".

*2: English, German, French, and Spanish are available for the guide display.

*3: The /HA option can be specified only when the Type 1 code is "-0" or "-2" and Type 3 code is "0".

*4: When the /CT option is specified, the UP32A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

| Model | Suffix code | Optional Suffix code | Description |
|----------------------------------|-------------|----------------------|---|
| UP35A | | | Program Controller (Power supply: 100-240 V AC) 2 program patterns/ 20 program segments (When the /AP option is specified, 4 program patterns/ 40 program segments, max. 20 segments per pattern.) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2:Functions | 0 | | None |
| | 1 | | 5 additional DIs, 5 additional DOs |
| Type 3: | 0 | | None |
| Open networks | 1 | | RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) |
| | 2 | | Ethernet communication (with serial gateway function) |
| | 3 | | CC-Link communication (with Modbus master function) |
| | 4 | | PROFIBUS-DP communication (with Modbus master function) |
| | 5 | | DeviceNet communication (with Modbus master function) |
| Display language ^{(*)1} | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /AP | 2 additional patterns/20 additional segments |
| | | /HA | Heater break alarm ^{(*)2} |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^{(*)3} |
| | | /CV | Terminal Cover |

| Model | Suffix code | Optional Suffix code | Description |
|----------------------------------|-------------|----------------------|---|
| UP32A | | | Program Controller (Power supply: 100-240 V AC) 2 program patterns/ 20 program segments (When the /AP option is specified, 4 program patterns/ 40 program segments, max. 20 segments per pattern.) (provided with retransmission output or 15 V DC loop power supply, 3 DIs, and 3 DOs) |
| Type 1: | -0 | | Standard type |
| Basic control | -1 | | Position proportional type |
| | -2 | | Heating/cooling type |
| Type 2:Functions | 0 | | None |
| | 1 | | RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) |
| | 2 | | 2 additional DIs, 2 additional DOs |
| Type 3: | 0 | | None |
| Open networks | 3 | | CC-Link communication (with Modbus master function) ^{(*)1} |
| Display language ^{(*)2} | -1 | | English (Default. Can be switched to other language by the setting.) |
| | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Fixed code | | -00 | Always "-00" |
| Optional suffix codes | | /AP | 2 additional patterns/20 additional segments |
| | | /HA | Heater break alarm ^{(*)3} |
| | | /DC | Power supply 24 V AC/DC |
| | | /CT | Coating ^{(*)4} |
| | | /CV | Terminal Cover |

Product Line-up


Digital Indicator with Alarms UM33A



Main Features

- Up to 9 alarm outputs (including one Fail)
- Input correction (linearization)
(PV bias, polygonal line approximation, polygonal line bias)
- 24 VDC sensor power supply available
- Simple operation
- CC-Link communication support



External Dimensions

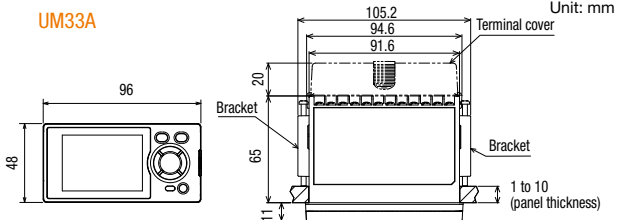

| Model | Suffix code | Optional suffix code | Description |
|---------------------------------|-------------|----------------------|---|
| UM33A | | | Digital Indicator with Alarms (Power supply: 100-240 V AC) (provided with retransmission output or 15 V DC loop power supply, 2 DIs, and 3 DOs) |
| Type 1:Basic | -0 | | Standard type |
| Type 2:Functions | 0 | | None |
| | 1 | | 1 additional DO (c-contact relay), RS-485 communication (Max.38.4 kbps, 2-wire/4-wire) ^{*1)} |
| | 2 | | 1 additional DO (c-contact relay) |
| Type 3: | 3 | | 6 additional DOs (c-contact relay; 1 point and open collector; 5 points) |
| | 0 | | None |
| Open networks | 3 | | CC-Link communication (with Modbus master function) ^{*2)} |
| | -1 | | English (Default. Can be switched to other language by the setting.) |
| Display language ^{*3)} | -2 | | German (Default. Can be switched to other language by the setting.) |
| | -3 | | French (Default. Can be switched to other language by the setting.) |
| | -4 | | Spanish (Default. Can be switched to other language by the setting.) |
| Case color | 0 | | White (Light gray) |
| | 1 | | Black (Light charcoal gray) |
| Optional suffix codes | /LP | | 24 V DC loop power supply ^{*4)} |
| | /DC | | Power supply 24 V AC/DC |
| | /CT | | Coating ^{*5)} |
| | /CV | | Terminal cover |

*1: When /LP option is specified, the RS-485 communication of the Type 2 code "1" is 2-wire system.
 *2: Type 3 code "3" can be specified only when the Type 2 code is "0" or "2".
 *3: English, German, French, and Spanish are available for the guide display.
 *4: The /LP option can be specified only when the code for Type 2 code is any of "0", "1" or "2", and the Type 3 code is "0".
 *5: When the /CT option is specified, the UM33A does not conform to the safety standards (UL and CSA) and CE marking (Products with /CT option are not intended for EEA-market).

5 digits, 14-segment large LCD display with PV color changing function
 You can set the display to change colors during alarms.

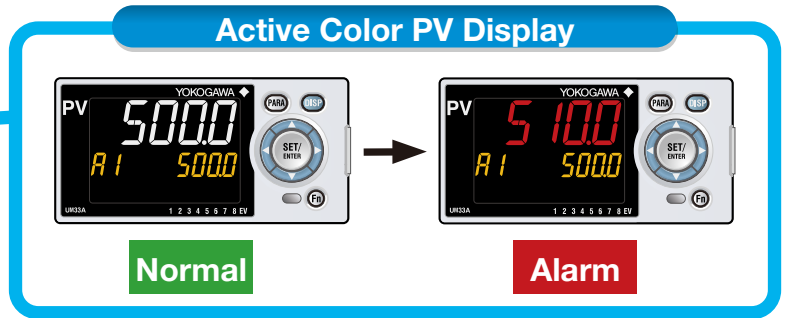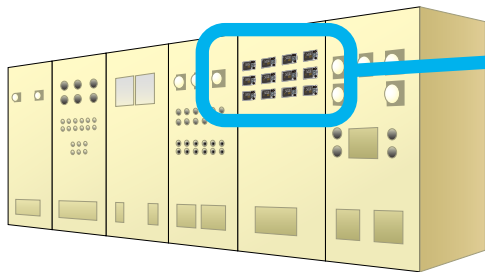

LL50A Parameter Setting Software


Parameter setting display



Program pattern creating display



Tuning display



Ladder program building display



Network profile creating display

| Model | Suffix code | Description |
|-------|-------------|--|
| LL50A | -00 | Parameter Setting Software with Ladder Program Building Function |


Main Features

SUPER Function suppresses overshoot

SUPER

The field-proven SUPER function utilizes a built-in "expert" operator and fuzzy logic to deliver fine control and suppress overshoot.

- When needing to suppress overshoot
- When needing to reduce the startup time
- When load changes are significant
- When setpoint is changed frequently

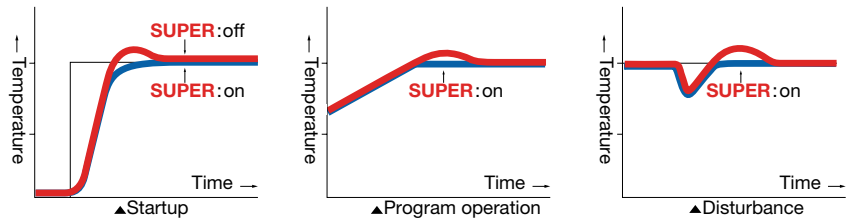


SUPER2 Function suppresses hunting

SUPER2


The new SUPER2 function utilizes a modern control algorithm to deliver fine control and suppress hunting.

- With frequent load fluctuations
- With frequent external disturbances that take time to normalize
- When hunting still occurs after setpoint (SP) changes even if PID constants are tuned

Effect 1: Material change or load change with the same PID.

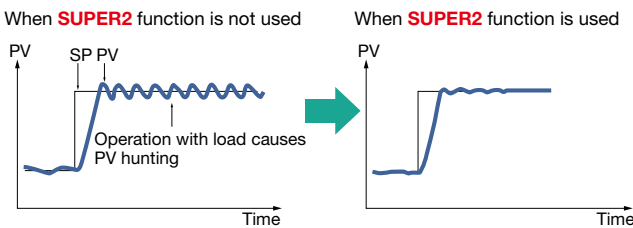

Effect 2: Setpoint (SP) change with the same PID.

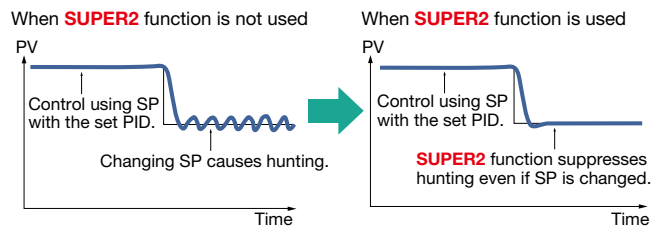

Auto-Tuning (AT) Function

Autotuning is a function that evaluates process characteristics to automatically sets optimal PID values relative to a target setpoint. To implement autotuning, you can configure the following conditions.

- Two algorithms to calculate PID constants are available.
 - Normal: Fast-rising PID constant
 - Stable: Slow-rising PID constant
- High and low output limits can be set for control output values during AT runtime.

Quick Setting Function

Minimum parameters necessary for operation can be set on the initial power up.

Security Function

The password function can prevent inadvertent changes to the parameter settings. If a password is set, the password is required when accessing to the Setup menu. When the password is verified, Setup Parameters can be changed.



Message Function

Using the message function and turning the contact input on/off, a message can be shown on PV display. The message is registered using LL50A Parameter Setting Software. The messages are limited to 20 alphanumeric characters. A maximum of four messages can be registered.



Operation Display



CLOSE VALVE

When the contact input is turned on, the scrolling message is displayed on PV Display.

Battery Free Memory Backup

Nonvolatile memory is used for memory parameters backup. Service life is improved because no batteries, backup capacitors, or other components are used.

Related Instruments

Temperature Controller UT100 Series

UT130/UT150/UT152/UT155

UT100
SERIES

Lowers equipment costs



48×48mm (1/16DIN)

48×48mm (1/16DIN)

48×96mm (1/8DIN)

96×96mm (1/4DIN)

- Small unit, large display
- Easy to use auto tune
- A wide variety of options including communications, alarms, and heater burnout alarms.

| Model | Suffix code | Optional suffix code | Description |
|---|-------------|----------------------|--|
| UT130 | | | Temperature controller |
| Output signal (for heating) ^{(*)1} | -R | | Relay contact output (for time-proportional PID or on/off control) |
| | -V | | Voltage pulse output (for time-proportional PID) |
| | N | | No cooling output (Standard type) |
| Output signal for cooling | R | | Relay contact output (for time-proportional PID) |
| | V | | Voltage pulse output (for time-proportional PID) |
| | | /AL | Alarm outputs (2 points) ^{(*)2} |
| Options | /HBA | | Heater burnout alarm and 2 other alarm outputs (includes the functions of /AL) ^{(*)1,*)2,*)3} |
| | /RS | | Communication function ^{(*)2} |
| | /V24 | | Power Supply 24VDC/24VAC |
| | | | |

*1: "/AL" cannot be specified when specifying "/HBA".

*2: "/HBA" and "/RS" cannot be specified at the same time when selecting heating/cooling type.

*3: Sensor of heater burnout alarm is CTL-6-S or CTL-12-S36-8 (URD Co., Ltd., Japan) To be purchased separately

| Model | Suffix code | Optional suffix code | Description |
|---|-------------|----------------------|--|
| UT150 | | | Temperature controller |
| UT152 | | | Temperature controller |
| UT155 | | | Temperature controller |
| Output signal (for heating) ^{(*)1} | -R | | Relay contact output (for time-proportional PID or on/off control) |
| | -V | | Voltage pulse output (for time-proportional PID) |
| | -A | | 4 to 20 mA output (for continuous PID) ^{(*)1} |
| Output signal for cooling | N | | No cooling output (Standard type) |
| | R | | Relay contact output (for time-proportional PID control) |
| | V | | Voltage pulse output (for time-proportional PID) |
| | A | | 4 to 20 mA output (for continuous PID) |
| Options | /AL | | Alarm outputs (2 points) ^{(*)2} |
| | /HBA | | Heater burnout alarm and 2 other alarm outputs (includes the functions of /AL) ^{(*)1,*)2,*)3,*)4} |
| | /EX | | Switchover between SP1 and SP2, and starting of timer by external contacts ^{(*)4,*)5} |
| | /RET | | 4 to 20 mA retransmission output of measured value (PV) ^{(*)3,*)5} |
| | /RS | | Communication function ^{(*)4,*)6} |
| | /V24 | | Power Supply 24VDC/24VAC |

*1: "/HBA" can not be specified when selecting "-A:4 to 20mA output".

*2: "/AL" can not be specified when "/HBA" is specified.

*3: "/HBA" and "/RET" cannot be specified at the same time when selecting standard type.

*4: "/EX" and "/RS" cannot be specified at the same time when selecting standard type.

*5: "/RET" cannot be specified when selecting heating/cooling type.

*6: "/HBA", "/EX" and "/RS" cannot be specified at the same time when selecting heating / cooling type.

*7: Sensor of heater burnout alarm is CTL-6-S or CTL-12-S36-8 (URD Co., Ltd., Japan) To be purchased separately

General Specifications: GS 05C01E02-01E

Program Temperature Controller

UP150

UT100
SERIES

Pattern control for small devices



48×48 mm (1/16DIN)

- Simple, 1-pattern (16 segments) program
- Comes standard with 2 events
- A variety of options including communications, retransmission, and digital inputs.

General Specifications: GS 05C01F12-01E

| Model | Suffix code | Optional suffix code | Description |
|---------------|-------------|----------------------|--|
| UP150 | | | Program Temperature controller |
| Output signal | -R | | Relay contact output (for time-proportional PID or on/off control) |
| | -V | | Voltage pulse output (for time-proportional PID) |
| | -A | | 4 to 20 mA output (for continuous PID) |
| Fixed code | N | | Always N |
| Options | /EX | | Two digital inputs for RUN/RESET and HOLD/CANCEL ^{(*)1} |
| | /RET | | 4 to 20 mA retransmission output of measured value (PV) |
| | /RS | | Communication function ^{(*)1} |
| | /V24 | | Power Supply 24VDC/24VAC |

*1: /RS option and /EX option cannot be specified at the same time.

Manual Setter UD Series

UD310/UD320/UD350

NEW
GREEN
SERIES

Instead of remote settings and volume



48×48 mm (1/16DIN)



48×96 mm (1/8DIN)



96×96 mm (1/4DIN)

General Specifications: GS 05F01F12-01E

| Model | Suffix code | Optional suffix code | Description |
|------------|-------------|----------------------|------------------------------|
| UD310 | | | Manual Setter (48×48×100mm) |
| UD320 | | | Manual Setter (48×96×100mm) |
| UD350 | | | Manual Setter (96×96×100mm) |
| Fixed code | -0 | | |
| Fixed code | 0 | | |
| Option | | /V24 | Power Supply 24V DC / 24V AC |


- One-touch adjustment of manual output (4 -20 mA DC)
- Includes a measured value display, comes standard with 2 alarm outputs
- Comes standard with a retransmission output that transmits the measurement input as current (4 -20 mADC).

Data Logging Software GA10

Monitors and records data from a variety of networked instruments



Broad support for data loggers, recorders, digital indicating controllers, signal conditioners, power monitors, and power meters. Even acquires data from Modbus devices.

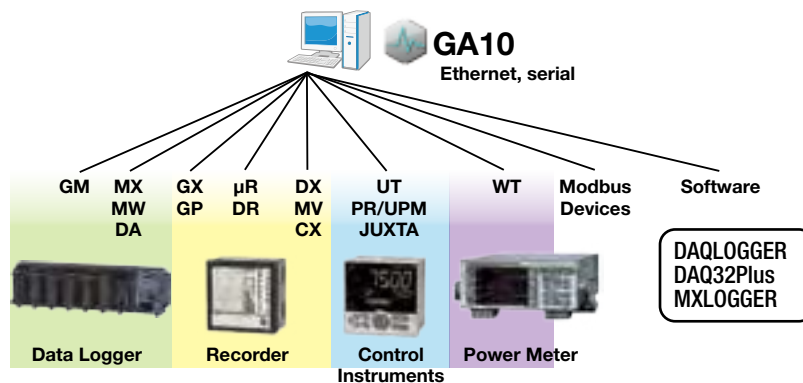

Specifications (Overview)

- Max. connectable units: 100
- Max. recording tags (channels): 2000
- Max. recording MATH tags (channels): 200
- Max connectable clients: Unlimited (verified with 32)
- Scan interval: 100 ms or higher (using PC time), or scan interval of instruments (using instrument time)

General Specifications: GS 04L65B01-01E

Paperless Recorder SMARTDAC+GX10/GX20

Read/write measured data on other instruments via Modbus protocol.



Cover color (BC option)


Modbus RTU (RS-422A/485 connection)

Modbus master



The data of slave units can be displayed and saved on the GX/GP using the Modbus RTU function*.

* Communication function option is required.

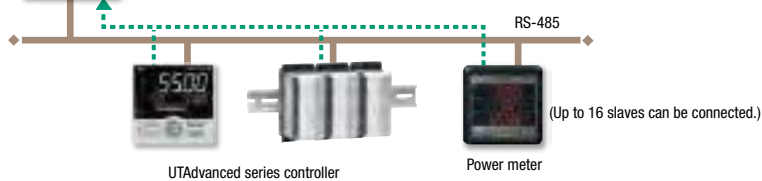

General Specifications: GS 04L51B01-01E

RS232C/RS485 Converter ML2

The ML2 is a socket type converter with 2 ports (RS-232C and RS-485) that performs isolation of communication signals, level conversion, and active control of drivers.

- Built-in RS-485 line termination resistance of 220 Ω (optional)
- Select auto or manual RS-485 driver active control
- Change communication speeds from 300 to 38400 bps in 8 stages with a rotary switch
- Echo-back ON/OFF switch (2-wire types only)
- Switch between 2-wire and 4-wire on the RS-485 side



ML2

General Specifications: GS 77J04L02-01E

UTAdvanced

Find us on your favorite search engine

UTAdvanced

www.UTAdvanced.com

Download user's manuals and specification documents here

STEP 1

UTAdvanced Y-Link

STEP 2

keyword *

product category *

product series/model /

document type

language

Choose a document type

Find answers to the most frequently asked questions.

FAQ : <http://www.yokogawa.com/ns/utadv/faq/>

3-Year Warranty

NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

vigilantplant, UTAdvanced and SMARTDAC+ are registered trademarks of Yokogawa Electric Corporation.
Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the United States and other countries.
Other company names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

vigilantplant[®]

The clear path to operational excellence

SEE
CLEARLY

KNOW
IN ADVANCE

ACT
WITH AGILITY

VigilantPlant is Yokogawa's automation concept for safe, reliable, and profitable plant operations. VigilantPlant aims to enable an ongoing state of Operational Excellence where plant personnel are watchful and attentive, well-informed, and ready to take actions that optimize plant and business performance.

YOKOGAWA ELECTRIC CORPORATION

Control Instruments Business Division/Phone: (81)-422-52-7179, Fax: (81)-422-52-6973

E-mail: ns@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

Phone: 800-258-2552, Fax: (1)-770-254-0928

YOKOGAWA EUROPE B.V.

Phone: (31)-88-4641000, Fax: (31)-88-4641111

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (65)-62419933, Fax: (65)-62412606

Sign up for our free e-mail newsletter
www.yokogawa.com/ns/

Vig-RS-6E

Printed in Japan, 504(KP) [Ed : 01/b]

Subject to change without notice.
All Rights Reserved, Copyright © 2015, Yokogawa Electric Corporation.

YOKOGAWA